



EHW100A

Application

The products are mainly used to control switching on/off of power supply of storage battery car, electric forklift, electric winch, electric car, excavator, air conditioner in vehicle, power source for communication facility.

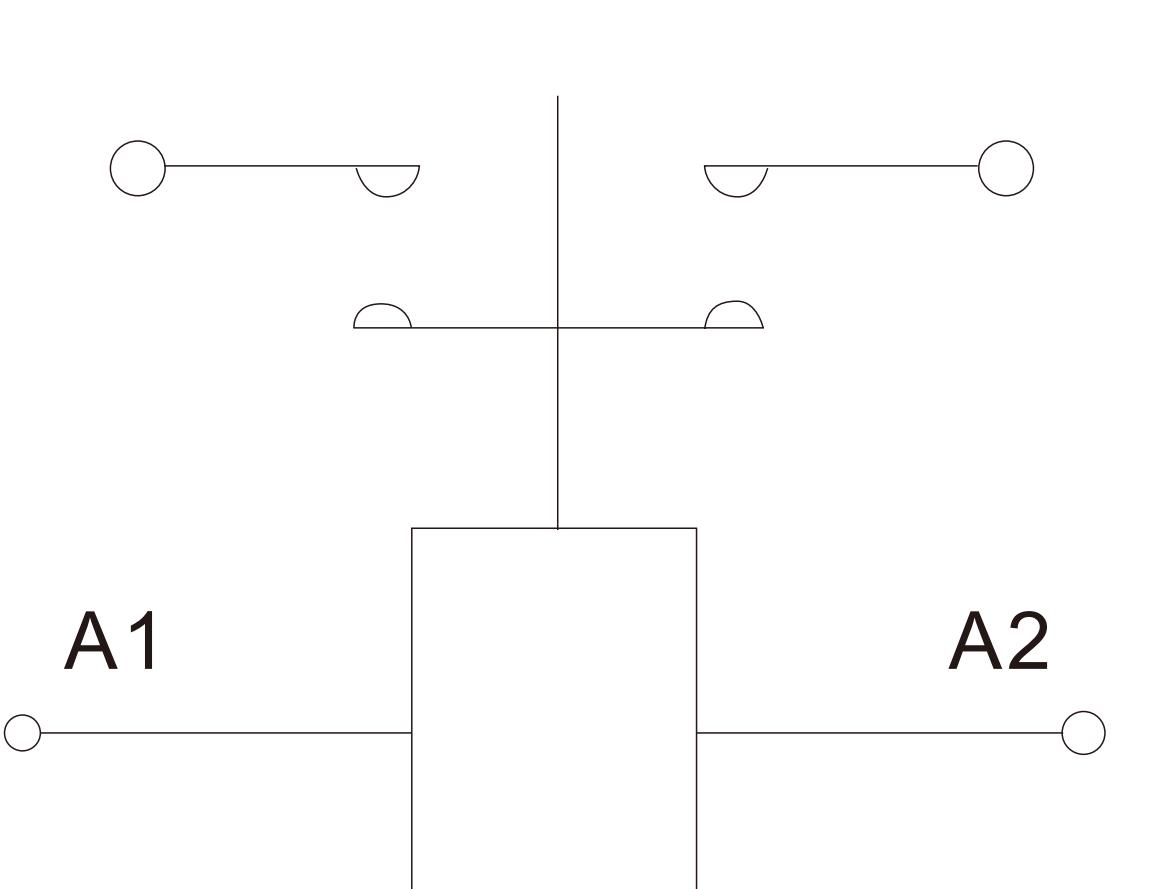
Ordering Notice

For example: EHW100A/12V
The DC contactor of main contact is one NO, rated voltage not more than DC 80V, current 100A, coil voltage is DC12V

Model and Meanings

EHW 100 A S / □

Rated voltage of coil (VDC)
Micro Switch
A: NO, B: NC
Rated current of main contacts (A)
Design Code

Electric Wiring Diagram**EHW100A****Basic Technical Parameters (at normal conditions)**

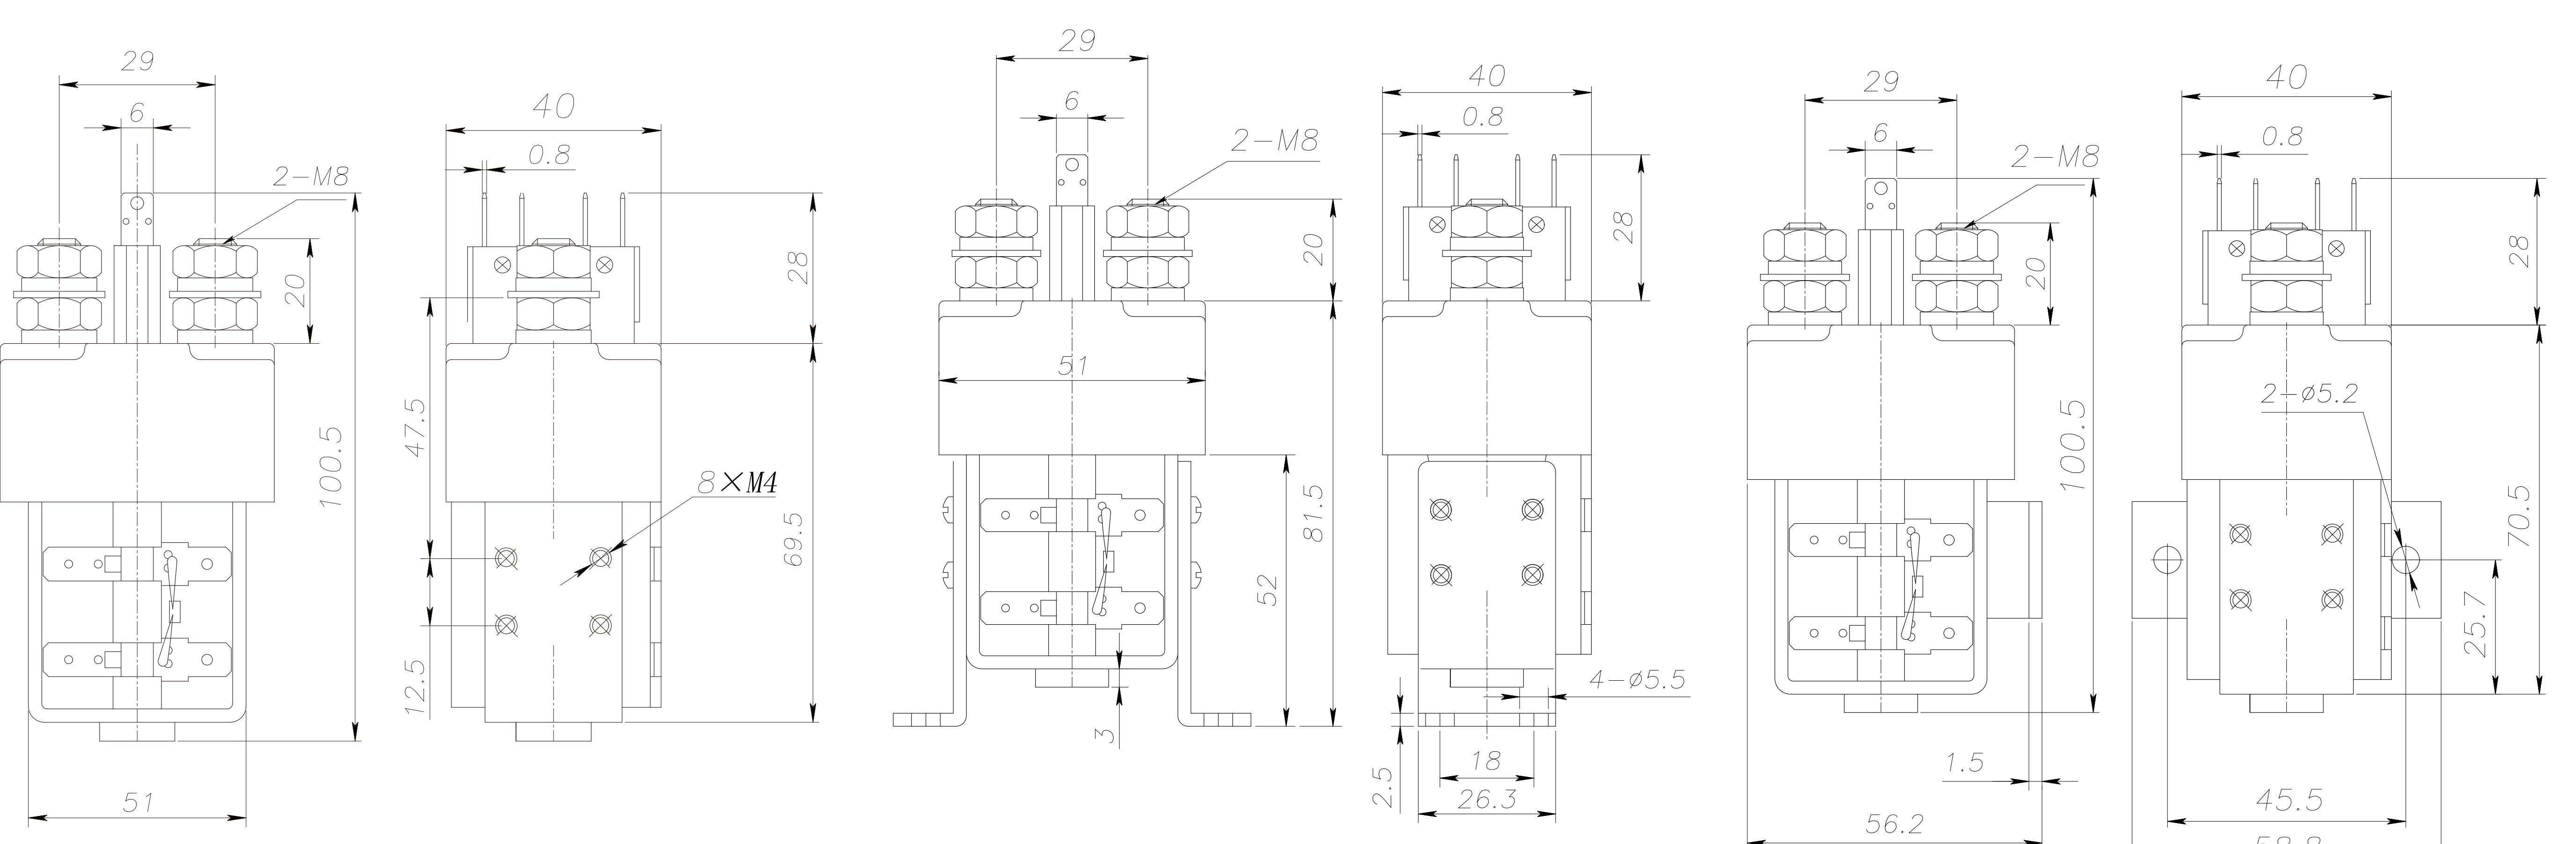
Electric Parameters		
Contact type	SPST-NO	Instantaneous maxi (closing) current 71e,≤1s
Rated voltage of contacts (DC)	≤80V	Insulation resistance(MΩ) ≥100
Rated current of contacts (A)	100	Dielectric withstand voltage 1500V,p.f. 1min, no breakdown
Voltage drop on contacts(mV)	≤80	Electric cycles (10 ⁴) ≥2
Coil voltage specification(DC)	12V, 24V, 48V, 72V etc	Mechanical cycles (10 ⁴) ≥30
DC power consumption of coil (W)	≤11	Temperature rise on outgoing terminal ≤65
Pickup voltage(DC)	≤75%Us	Temperature rise of coil(K) ≤85
Release voltage(DC)	≥5%Us;≤40%Us	Insulation grade of enameled wire Class B (130°C)
Pickup time(ms)	≤30	Material of contact AgCuO(10)/Cu
Release time(ms)	≤50	Working duty Continuous operating duty

Mechanical/Ambient Conditions

Torque of outgoing terminal on contact M8(N.m)	≥9.0N appropriate	Protection grade	IP50
Coil lead end thickness(mm)	0.8	Mounting methods	Freely
Working temperature (-25~+55)°C		Vibration	Sine shock: 2.5g, (5~50) Hz
Mounting altitude ≤2Km		Impact	50g,11ms(Half sine)

Conversion Table for Coil Specification(20°C)

Voltage(V)	Coil resistance(1±10%)Ω	Voltage(V)	Coil resistance(1±10%)Ω
12	17.1	48	210.4
24	67.7	60	442.0
36	161.1	72	568.6

Outline and Mounting Picture

Installation method "0"

Installation method "1"

Installation method "2"

Basic size(mm)	Tolerance size(mm)
0~30	±0.2
30~60	±0.3
60~100	±0.5
>100	±1.0

Note: When using the installation mode "0", please specify the length of the M3 screw in the contract. The default length is M3×6